

# UES5 系列电涌保护器


## 六、UES5 系列电涌保护器

### 产品特点

UES5 系列电涌保护器，设计符合 IEC61643-1、GB18802.1，适合用于交流 50Hz/60Hz，420V 及以下的各种供电系统，产品内置失效脱离装置，可靠指示工作状态，并可带遥信触点功能，实现远程监控；响应时间低于 25 纳秒，采用 35mm 电气导轨安装，安装方便。



### 型号及其含义

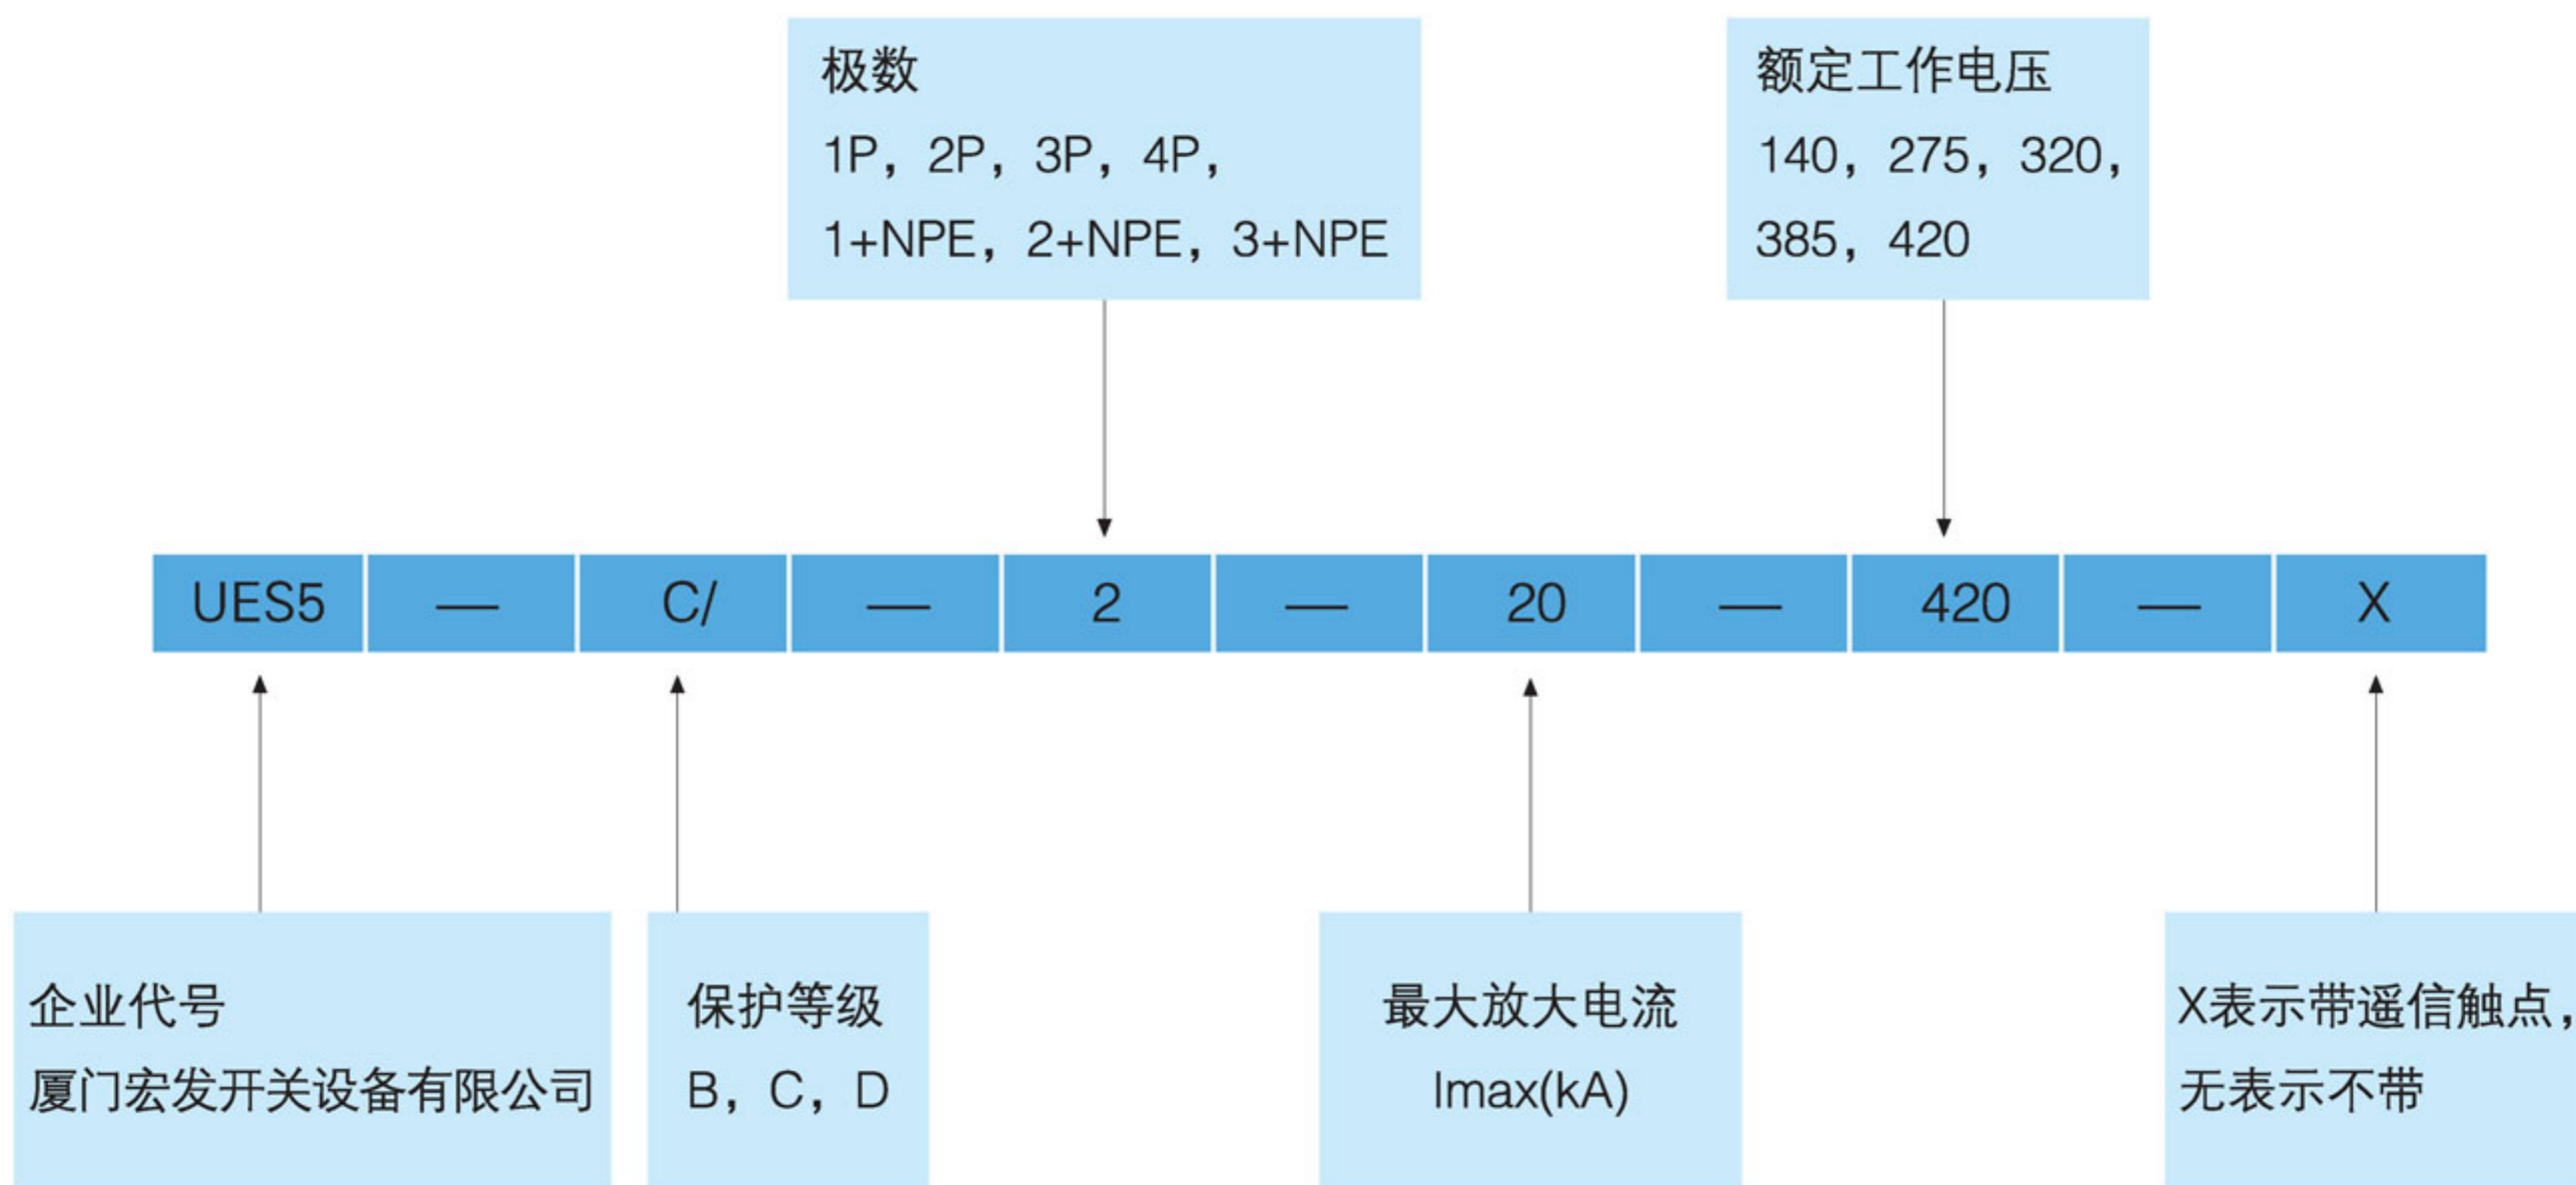

# UES5 系列电涌保护器

## 产品选型表

型号	测试依据	额定工作电压 (Un)	额定放电电流 In(8/20us)	最大放电电流 I <sub>max</sub> (8/20us)	响应时间 t(ns)	保护等级依据 IEC529
UES5-D/□-10-140	IEC61643-1 GB18802.1	140	5kA	10kA	低于25	IP20
UES5-D/□-10-275		275				
UES5-D/□-10-320		320				
UES5-D/□-10-385		385				
UES5-D/□-10-420		420				
UES5-D/□-20-275		275	10kA	20kA		
UES5-D/□-20-320		320				
UES5-D/□-20-385		385				
UES5-D/□-20-420		420				
UES5-C/□-40-275		275	20kA	40kA		
UES5-C/□-40-320		320				
UES5-C/□-40-385		385				
UES5-C/□-40-420		420				
UES5-C/□-60-275		275	30kA	60kA		
UES5-C/□-60-320		320				
UES5-C/□-60-385		385				
UES5-C/□-60-420		420				
UES5-B/□-80-275		275	40kA	80kA		
UES5-B/□-80-320		320				
UES5-B/□-80-385		385				
UES5-B/□-80-420		420				
UES5-B/□-100-320		320	50kA	100kA		
UES5-B/□-100-385		385				
UES5-B/□-100-420		420				
UES5-B/□-140-320	320	80kA	140kA			
UES5-B/□-140-385	385					
UES5-B/□-140-420	420					