

FEATURES特点

- UL, CE, TUV & CQC safety approval.
UL, CE, TUV 及 CQC 安规认证.
- Single contact 953 series relay offers 30A switching capacity for various kinds of applications.
单触点953系列继电器提供30A的开关容量为各种应用
- Meets UL 508 & UL 873 spacing.
符合 UL 508 及 UL 873 要求.
- Both PCB terminal & Quick Connect Terminal for contacts.
有电路板端子及快接端子供双面安装连接
- UL class F coil insulation type available.
UL Class F线圈绝缘



UL FILE NO.: E162117/E188367
 TUV FILE NO.: R02158203
 CQC FILE NO.: CQC02001001783

用途：汽车、机床电器、电子设备、
 空调和各种家用电器。

CONTACT RATING 接点参数

Contact Form接点形式	1A SPST-NO	1B SPST-NC	1C SPDT	
			NO	NC
Max. Switching Power最大切换功率	7500VA(30A) 600W (20A)	4800VA 300W	7500VA600W	
Max. Switching Voltage最大切换电压	250VAC 30VDC	250VAC 20VDC	250VAC 30VDC	
Max. Switching Current最大切换电流	30A	20A	30A	
Min. Switching Current/Voltage 最小切换电流/电压	100mA 5VDC			
Rating Load(Resistive)额定负载(阻性)	20A / 277VAC 20A / 30VDC 30A / 250VAC	15A / 277VAC 20A / 240VAC 10A / 30VDC	20A / 277VAC 30A / 240VAC 20A / 30VDC	15A / 277VAC 30A / 240VAC 10A / 30VDC
Contact Material 接点材质	Ag Alloy 银合金			

CHARACTERISTICS 性能参数

Electrical Life 电气寿命	1×10^5
Mechanical Life机械寿命	1×10^7
Insulation Resistance绝缘阻抗	Min. 500M Ω 500VDC
Contact Resistance(Initial)接点电阻	$\leq 100m\Omega$
Operate Time 动作时间	$\leq 15ms$
Release Time 开放时间	$\leq 10ms$



953B系列继电器SERIES RELAY

Initial Dielectric Strength 耐压	between open contact开放接点间: 50/60Hz 1500VAC 1min. between contacts and coil接点与线圈间:50/60Hz 2500VAC 1min.	
Vibration Resistance 耐振动	Malfunction: 误动作:	10 ~ 55Hz Double Amplitude双振幅1.5mm
	Damage limits: 耐久:	10 ~ 55Hz Double Amplitude双振幅1.5mm
Shock Resistance 耐冲击	Malfunction: 误动作:	10G
	Damage limits: 耐久:	100G
Ambient Temperature环境温度	-40°C ~ +85°C (No freezing 无结冰)	
Relative Humidity相对湿度	85% at 40°C	
Unit Weight单位重量	约Approx. 28g	

ORDERING INFORMATION型号代码说明

953-1C-12 D B F 1 2 3 4 5 6	
1. Model Number 型号 2. Contact Arrangement接点形式 1A = 1 Form A 1组常开 1C = 1 Form C 1组转换 3. Coil Voltage 线圈电压 5 ~ 110VDC 6 ~ 220VAC	4. Coil Type 线圈形式 D=DC 直流 A=AC 交流 5. Enclosure Connect Type 周围连接形式 B= Double Connect II Type 双面连接II型 6. Type of Insulation 绝缘等级 Nil = Class B F = Class F

COIL RATINGS (at 20°C) 线圈额定值 (在20°C)


COIL TYPE 线圈形式	Coil Nominal Voltage 线圈额定电压 (V)	Coil Resistance 线圈阻抗 (Ω ± 10%)	Pick-Up Voltage 动作电压(V) (Max)	Drop-Out Voltage 开放电压(V) (Min)	Nominal Current 额定电流 (mA)
DC Standard Coils 直流标准线圈 (abt. 0.9W)	5	27	3.75	0.5	185
	6	40	4.5	0.6	150
	9	97	6.75	0.9	93
	12	155	9	1.2	77
	18	380	13.5	1.8	47
	24	660	18	2.4	36
	36	1440	27	3.6	25
	48	2560	36	4.8	19
AC Coils 交流线圈 (abt. 1.2VA~1.8VA)	6	10	5.1	0.6	
	12	43	10.2	1.2	
	24	160	20.4	2.4	
	110	3160	93.5	11	
	220	13490	187	22	

* Max Continuous Voltage at 20°C: 130% of Coil Normal Voltage. 最大使用电压在20°C:线圈额定电压的130%
 * AC coils Max continuous Voltage at 20°C 110% 交流线圈最大使用电压在20°C: 线圈额定电压的110%


OUTLINE DIMENSIONS 外部尺寸

UNIT: mm(inch) 单位: 毫米(英寸)

Dimensions尺寸

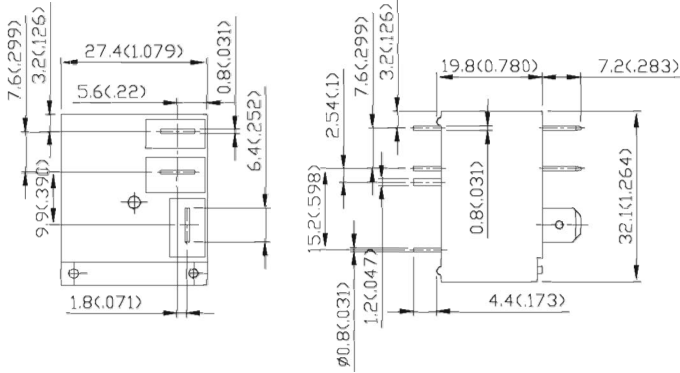


Internal Connections 接线图
(Bottom View 底视图)

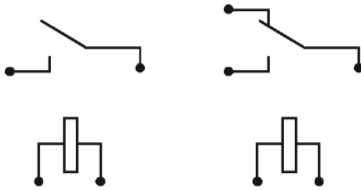

1A

1C


Drilling Plan 孔位图
(Bottom View 底视图)




REMARK: Dimensions $\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.2\text{mm}$
备注: 尺寸公差 $\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, 印刷电路板孔 $+0.2\text{mm}$

953B Reference Data 参考资料


Timing



Coil Temperature Rise




Life Curves

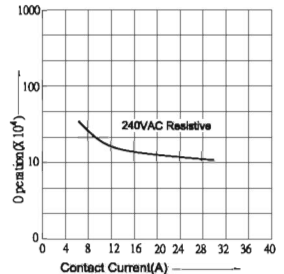


OUTLINE DIMENSIONS 外部尺寸

UNIT: mm(inch) 单位: 毫米(英寸)

Dimensions尺寸

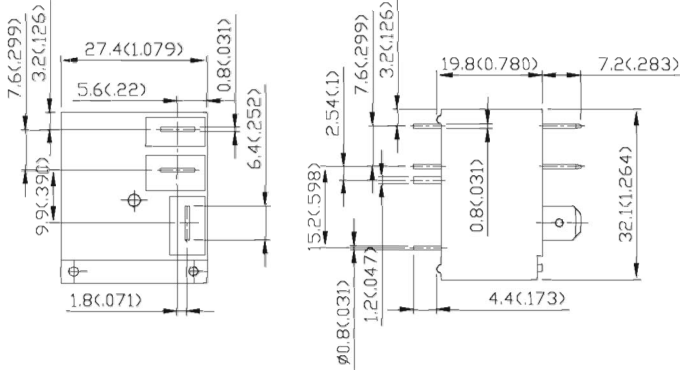


Internal Connections接线图
(Bottom View底视图)

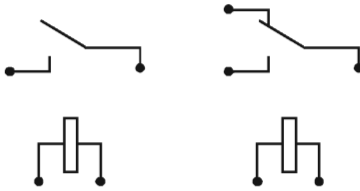

1A

1C


Drilling Plan孔位图
(Bottom View底视图)




REMARK: Dimensions $\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.2\text{mm}$
备注: 尺寸公差 $\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, 印刷电路板孔 $+0.2\text{mm}$

953B Reference Data 参考资料

Timing



Coil Temperature Rise



Life Curves

