




# MICRO SWITCHES

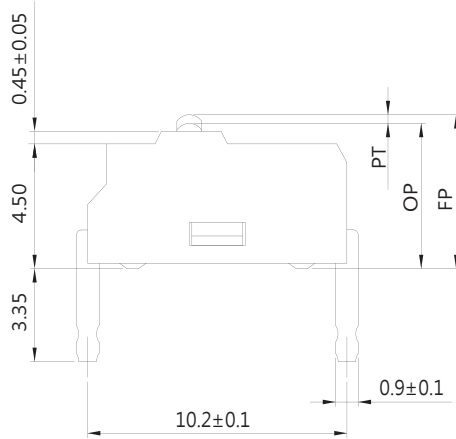

## DIMENSIONS

Unless otherwise specified, a tolerance of  $\pm 0.4\text{mm}$  applies to all dimensions.

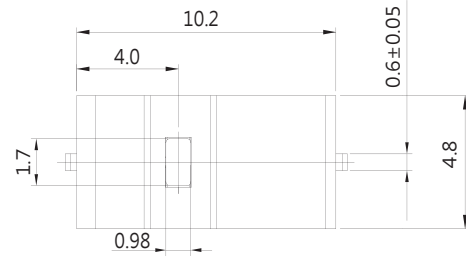

## DS1 SERIES

### SPECIFICATIONS

#### Contact Resistance(initial)

Max. 300 m $\Omega$

Measured by ohm meter - open voltage < 1VDC, driver current -100 mA

#### Insulation Resistance(at 250 VDC / minute)

Min. 100 M $\Omega$

#### Dielectric Strength

Min. 250VAC(50-60HZ)/minute between Live-parts and dead metal parts

#### Operating Temperature Range

-40°C to 85°C (with no icing)

#### Vibration

10~55Hz, displacement 0.75 mm (p-p)

#### Electrical Service Life

Min.3,000,000 operations

#### Electrical Operating Frequency

120 operations per minute

#### Mechanical Service Life

Min. 5,000,000 operations

#### Mechanical Operating Frequency

120 operations per minute

#### Operating application of the switch

Set the switch pushing distance from 60% to 90% of the specified OT value


### RATING

0.1A 12VDC , 0.1A 125VAC

### APPLICATIONS


Mouse, Joystick

### CONTACT CONFIGURATION




### MOUNTING HOLES

#### P,C,D Type Terminal




#### T Type Terminal




### TERMINAL TYPES


#### P TYPE

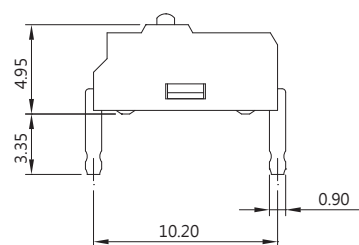


#### C TYPE




#### D TYPE




#### T TYPE



ORDERING INFORMATION

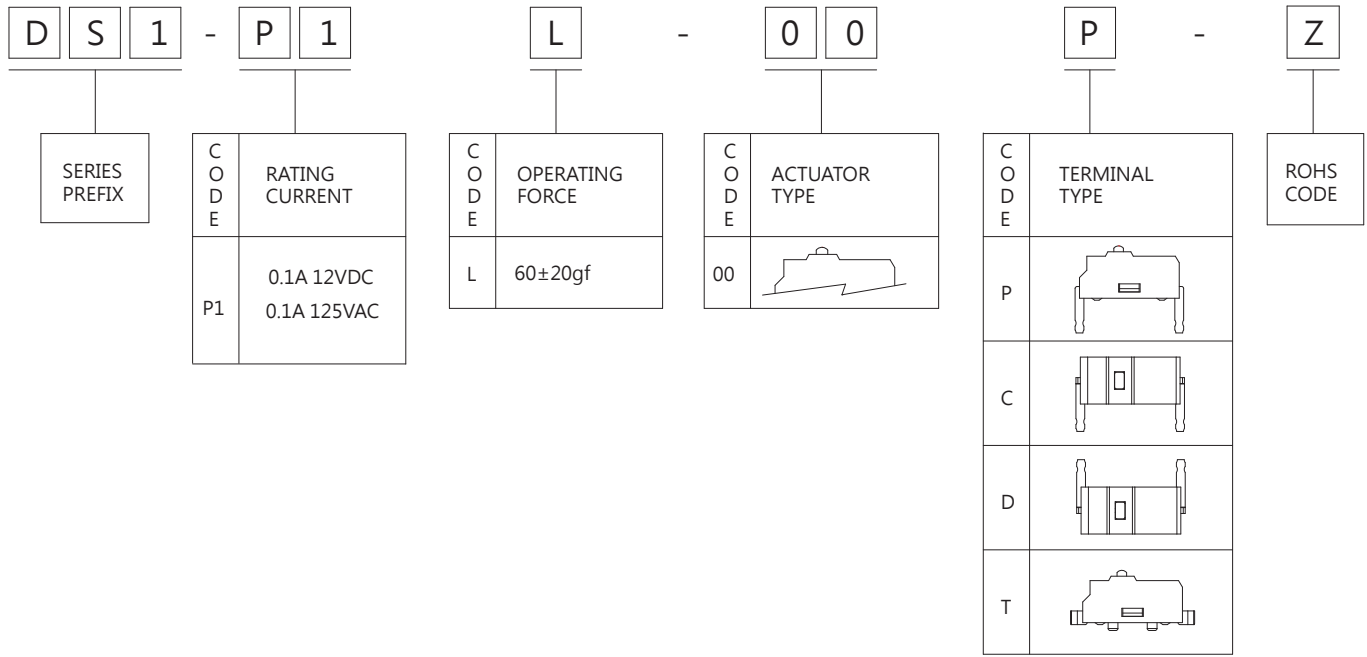

OPERATING CHARACTERISTICS

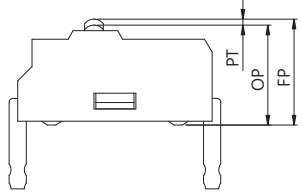SWITCH TYPE	PART SUFFIX	OF (gf)	OP (mm)	PT Max. (mm)	OT Min. (mm)	MD Max. (mm)	RF Min. (gf)
DS1-P1L-00 □ -Z		L 60±20	5.25±0.2	0.62	0.15	0.12	15